

Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

EPM LED Mini Wall Pack

Features:


- High performance LED technology
- Dimmable drivers
- Integral 120V photocell included
- Mount directly over a 4" recessed outlet box. Threaded stem and nut included

Applications:

Suitable for most exterior wall mount applications

- Industrial
- Retail
- Commercial

Schematics:

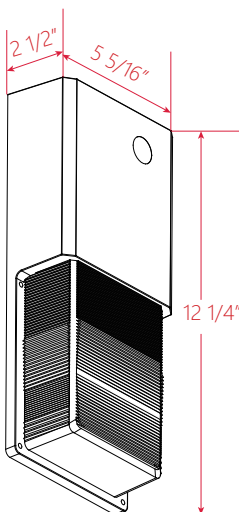

Construction:

- Stamped galvanized back plate with white powdercoat finish
- Molded polycarbonate front housing in bronze finish
- Clear polycarbonate prismatic lens

Certifications:

- CSA listed for wet locations
- IP54

Predicted L70 Lifetime:

- 50,000 hrs
(based on LM-80, TM-21 and in-situ laboratory testing)

Ambient Operating Temp:

- -40°C to 40°C

Warranty:

- 5 year limited system warranty
- see www.LumenFocus.com for complete warranty terms and conditions



EPM LED Mini Wall Pack



Ordering Guide:

example: EPM LW F UV CPP 850-PC120 BZ

Series	Output	Optic	Voltage	Shielding	CRI/CCT	-	Options	Finish
EPM	LW	F	UV	CPP	850	-		BZ
EPM	LW	F	UV	CPP	850		PC120 (standard) PC277 SF DF	BZ

Lumen Output: LW Low

CRI/CCT: 850 80 CRI / 5000K

Optic: F Foward

Options: PC120 Photocell, 120V (*comes standard*)

Voltage: UV 120-277V

PC277 Photocell, 277V

SF Single Fuse

DF Double Fuse

Shielding: CPP Clear Prismatic Polycarbonate

Finish: BZ Bronze

Photometric Data:



EPM LW F UV CPP 850

Test No.: Q2014092001

Luminaire Lumens: 780 lm

Luminaire Watts: 10.3W

Efficacy: 75.8 LPW

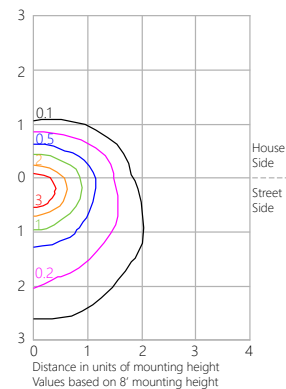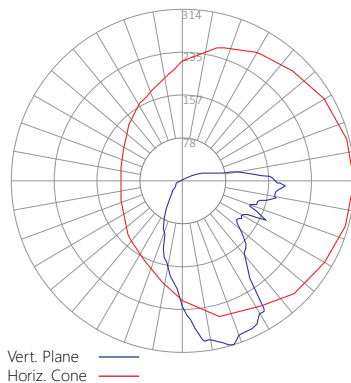

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lum
FL (0-30)	113.2	14.5
FM (30-60)	174.8	22.4
FH (60-80)	118.4	15.2
FVH (80-90)	75.7	9.7
BL (0-30)	58.8	7.5
BM (30-60)	63.5	8.1
BH (60-80)	26	3.3
BVH (80-90)	11.8	1.5
UL (90-100)	69.2	8.9
UH (100-180)	69.1	8.9
Total	780.5	100.0

BUG Rating

B0-U3-G1