



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

WPA LED Adjustable Wall Pack

Features:

- High performance LED technology
- 0-10V dimming drivers standard
- Integral button-type photocell
- 120 degree adjustable head
- Full cut-off at 0° head adjustment
- Attractive architectural styling in compact design
- Simple hands-free installation when making electrical connections


Applications:

Suitable for exterior wall mount applications

Ambient Operating Temp:

- -20°C to 40°C

Schematic:

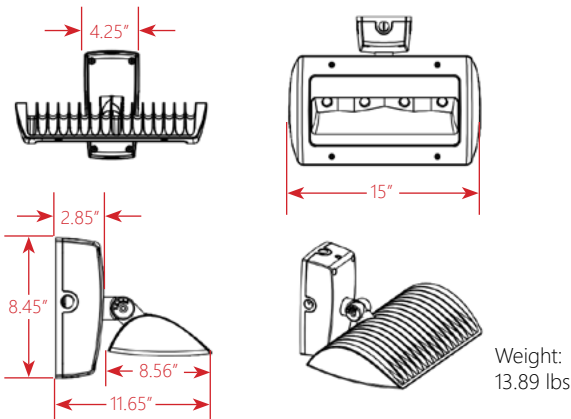

Construction:

- Precision die cast aluminum housing with stainless steel hardware
- Chip and fade resistant bronze powder coat finish
- Tempered flat glass lens
- Specular forward throw reflector
- Ingress resistant gasket included

Certifications:

- cULus listed for wet locations
- IP65

Predicted L70 Lifetime:

- > 50,000 hrs

Warranty:

- 5 year limited system warranty
- see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: WPA MD F UV CFG 740-PC BZ

Series	Output	Optic	Voltage	Shielding	CRI/CCT	-	Options	Finish
WPA		F	UV	CFG	740	-	PC	BZ
WPA	MD HI	F	UV	CFG	740		PC	BZ

Series: WPA Adjustable Wall Pack

Lumen Output: MD Medium
HI High

Optic: F Forward

Voltage: UV 120-277V

Shielding: CFG Clear Flat Glass

CRI/CCT: 740 70 CRI / 4000K

Options: PC Photocell

Finish: BZ Bronze



Performance Chart:

Catalog #	Lumens	Watts	LPW
WPA MD F UV CFG 740	6953	54	128.7
WPA HI F UV CFG 740	10538	83	126.7

Photometric Data:

WPA HI F UV CFG 740

Test No.: 2017010683
Luminaire Lumens: 10538.2 lm
Luminaire Watts: 83.2W
Efficacy: 126.7 LPW

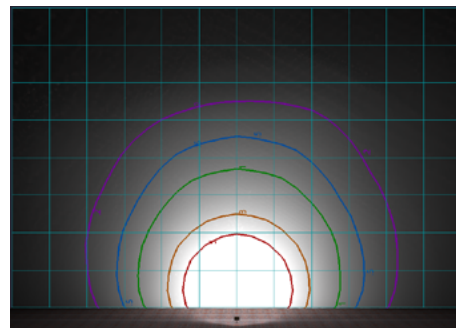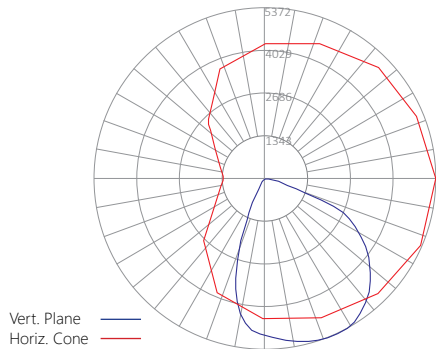

Mounting Height = 20'
 Grid: 10' x 10' squares

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08