



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

EDL | LED Emergency Gimbal Downlight

Features:

- Ultra-bright, long life 1.5W LED lamp
- Dual 120/277V
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- 6V maintenance-free, rechargeable sealed lead acid battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination
- Fully automated solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

Mounting:

- Compatible with drop ceiling mount installations. Bar hangers included

Applications:

Suitable for recessed ceiling mount applications where emergency lighting is needed

Construction:

- 6" recessed housing with mounting bar hangers
- Impact resistant thermoplastic adjustable gimbal trim
- Junction box with 3/4" knockouts for AC input
- White or black trim securely attached to housing with spring clips

Certifications:

- UL listed for dry locations (25°C)
- UL924
- NFPA 101 Life Safety Code
- NEC
- OSHA
- Local and State Codes



Warranty:

- 5 year limited warranty on housing and electronics. Battery pro rated for 2 yrs.
- see www.LumenFocus.com for complete warranty terms and conditions




Ordering Guide:

example: EDL DV W

Series	Voltage	Housing Color
EDL	DV	
EDL Emergency Gimbal Downlight	DV Dual 120V/277V	W White B Black



Schematic:

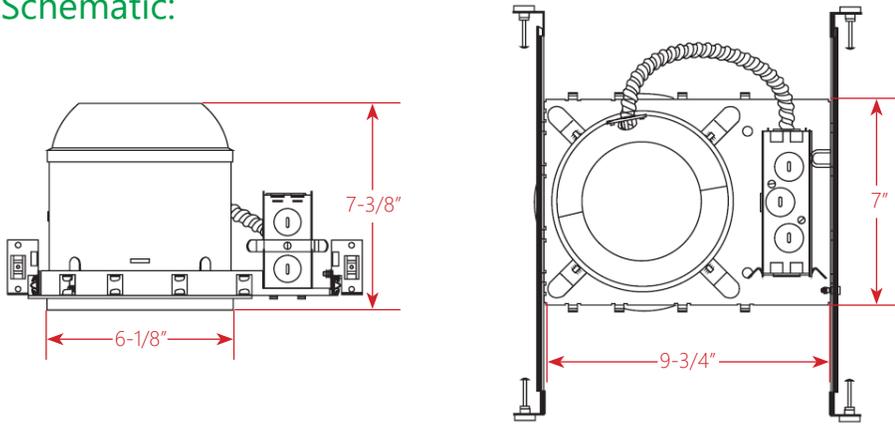

Photometric Data:

EDL DV W

Test No.: STC-20170724
 Luminaire Lumens: 116 lm
 Luminaire Watts: 1.5W
 Efficacy: 77 LPW
 Spacing Criterion (0-180): 0.14
 Spacing Criterion (90-270): 0.5

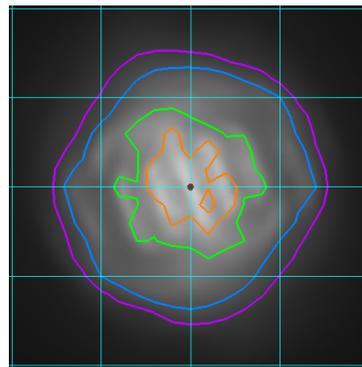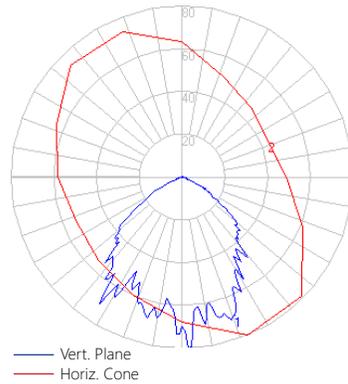

Mounting Height = 8'
 Grid: 8' x 8' squares

Isolines at:
 1fc/0.5fc/0.3fc/0.1fc/0.05fc

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08

