



Project: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Cat. #: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Quantity: \_\_\_\_\_

LED

## DLG 56 | 5"/6" LED Gimbal Down Light

### Features:

- High performance LED technology
- Dimmable to 10% with most dimmers
- Standard gimbal compatible with most 5" & 6" housings
- Compatible with insulated, non-insulated, and air-tight ceilings

### Applications:

Suitable for most commercial, industrial and institutional applications

- Retail
- Hospitality
- Office
- Residential

### Predicted L70 Lifetime:

- 50,000 hrs (reported)  
 (based on LM-80, TM-21 and in-situ laboratory testing)

### Construction:

- Durable thermoplastic construction
- E26 medium screw-base Edison connector allows for easy retrofit of incandescent housings
- Adjustable torsion spring designed to fit 5" or 6" housing allows for toolless

### Certifications:

- ETL US and Canada Listed for damp locations
- Passes FCC Class B



### Ambient Operating Temp:

- -20°C to 40°C

### Warranty:

- 5 year limited system warranty - see [www.LumenFocus.com](http://www.LumenFocus.com) for complete warranty terms and conditions



## Ordering Guide:

example: DLG 56 MD 12 WB 827-61CNC

| Series | Size            | Output       | Voltage    | Reflector Trim             | CRI/CCT  | Frame   |
|--------|-----------------|--------------|------------|----------------------------|--|---|
| DLG    | 56              | MD           | 12         | WB                         |  |   |
| DLG    | 56<br>5" and 6" | MD<br>Medium | 12<br>120V | WB<br>White Baffle (Round) | <b>827</b><br>80 CRI / 2700K<br><br><b>830</b><br>80 CRI / 3000K<br><br><b>840</b><br>80 CRI / 4000K | <b>Blank</b><br>No Frame<br><br><b>61CNC</b><br>6" IC New Construction<br>Frame-In Kit<br><br><b>61CRM</b><br>6" IC Remodeler<br>Frame-In Kit |

## Performance Chart:

| Catalog #           | Lumens | Watts | LPW | Title 24, 2016 | Energy Star |
|---------------------|--------|-------|-----|----------------|-------------|
| DLG 56 MD 12 WB 827 | 975    | 14    | 70  | No             | Yes         |
| DLG 56 MD 12 WB 830 | 975    | 14    | 70  | No             | Yes         |
| DLG 56 MD 12 WB 840 | 1050   | 14    | 75  | No             | Yes         |

## Photometric Data:


### DLG 56 MD 12 WB 827

Test No.: 20161201


Luminaire Lumens: 1,239 lm

Luminaire Watts: 14.8W


Efficacy: 83.7 LPW

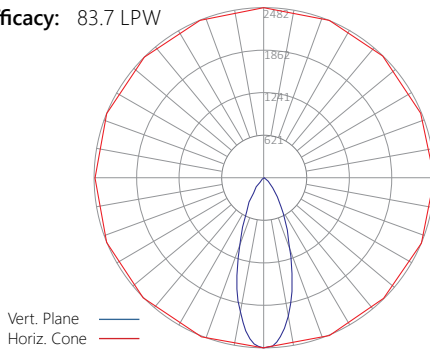

## Schematic:

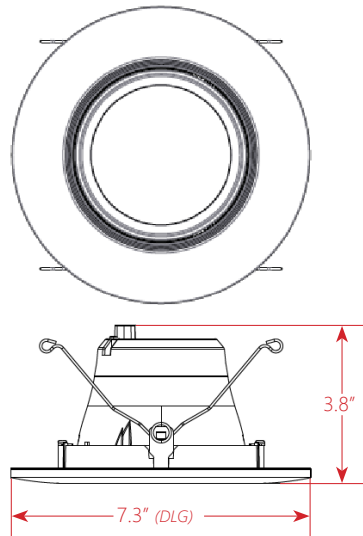


## Frame-In Kits:

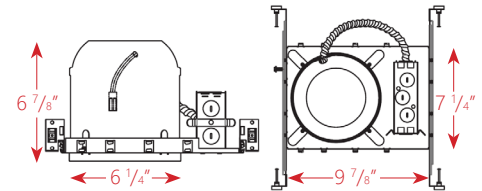

### New Construction Applications: 61CNC

Designed for new construction applications and in ceilings with direct contact with insulation. Air tight construction provides reduced energy costs.

- CULUS Listed for damp locations
- Galvanized steel construction with removeable housing for easy access to the junction box
- Listed for through branch circuit wiring
- Pre-installed Real nail easily installs in regular and engineered lumber
- Adjustable bar hangers from 13 5/8" - 25" and can be repositioned 90° on plaster frame
- Contains one 1 1/8", six 7/8" knockouts and four Romex pryouts with strain relief

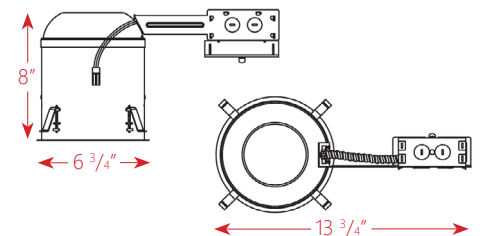

### Remodel Applications: 61CRM

Designed for remodel applications and in ceilings with direct contact with insulation. Air tight construction provides reduced energy costs.

- CULUS Listed for damp locations
- Galvanized steel construction with removeable housing for easy access to the junction box
- Listed for through branch circuit wiring
- Four remodel clips secure housing and accommodates 1/2" and 5/8" ceiling materials
- Housing adjusts from 5/8" to 1 3/8" to accommodate various ceiling thicknesses
- Contains one 1 1/8", six 7/8" knockouts and four Romex pryouts with strain relief

