

Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

EVT 2 | LED Extruded Vaportight

Features:

- High performance LED technology
- 0-10V dimming drivers standard
- Field replaceable LED boards and drivers
- Multiple hanging options, including surface, chain/cable, or pendant for easy installation
- UL approved and evaluated for daisy chaining

Applications:

Suitable for most commercial, industrial and institutional applications

- Warehouse
- Manufacturing Facility
- Food Processing
- Stairwells
- Car Wash

Predicted L70 Lifetime:

- >100,000 hrs (calculated)
- >72,000 hrs (reported)
- 80% lumen maintenance @ 72,000 hrs (based on LM-80, TM-21 and in-situ laboratory testing)

Dimensions:

- Length: 2'
- Width: 3.86"
- Depth: 3.75"



Construction:

- (f1) rated acrylic co-extruded lens and housing - lens and housing is all one piece
- Pre-painted cold rolled steel board trays
- Gasketed end caps
- Stainless steel mounting hardware

Certifications:

- UL 1598 listed for US and Canada, suitable for wet locations
- IP65
- IP66
- NSF
- RoHS



Ambient Operating Temp.:

- -30°C to 40°C

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: EVT 2 MD UV FA 840 SB

Series	Length	Output	Voltage	Shielding	CRI/CCT	Mounting	Options
EVT	2		UV	FA			
EVT	2 2'	VL Very Low	UV 120-277	FA Frosted Acrylic	835 80 CRI/3500K	Blank Snap-On Mounting Bracket (For Surface Mounting)	Blank No Options
		840 80 CRI/4000K			SMBB Snap-On Mount with Bracket Bail (For Chain or Cable Mounting)	C6 6' Single Circuit Cord	
		MD Medium			850 80 CRI/5000K	SMBBQC Snap-On Mount with Bracket Bail and 10' Quick Hang Cable Kit	C6(LVL) C6 With Integrated Dimming Leads
					SMBBQC20 Snap-On Mount with Bracket Bail and 20' Quick Hang Cable Kit	C10 10' Single Circuit Cord	
						SMBBQC20 Snap-On Mount with Bracket Bail and 20' Quick Hang Cable Kit	C10(LVL) C10 With Integrated Dimming Leads
						SMD Snap-On Mount Drilled (For Threaded Rod Pendant, Not Included)	D6 6' Dual Circuit Cord
							D10 10' Dual Circuit Cord
							SB Safety Bail
							LVL 0-10V Dimming Leads for Easy Field Access
							BAA Buy American Act Compliant



Mounting:




Snap On Bracket (Standard)



SMBB
Bracket Bail (for chain or cable mounting)



SMD
Drilled (for threaded rod pendant mounting)



SB
Safety Bail Option




Performance Chart:

Catalog #	Watts	Lumens (835)	LPW (835)	Lumens (840)	LPW (840)	Lumens (850)	LPW (850)
EVT 2 VL UV FA 8xx	18	1930	109.4	1993	113.0	2053	116.4
EVT 2 LW UV FA 8xx	23	2588	111.4	2673	115.1	2754	118.5
EVT 2 MD UV FA 8xx	33	3504	106.4	3620	109.9	3728	113.2

Photometric Data:

Relative Luminous Intensity

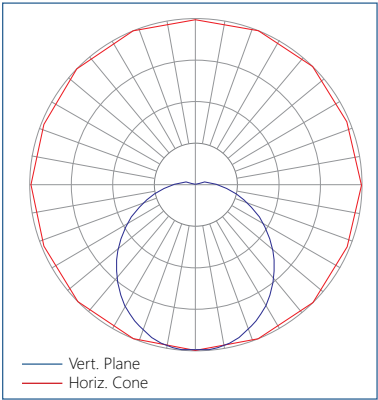

LUMENFOCUS
Re-boardABILITY

The EVT features field replaceable boards and drivers. This allows you to upgrade to more efficient technology in the future. Or, in the rare event of a failure, you can rapidly replace defective components. Re-boardABILITY helps to ensure you won't get stuck with an obsolete light fixture.
[Learn more about Re-boardABILITY here.](#)

