



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

CPE | LED Canopy Light

Features:

- High performance LED technology

Applications:

For use in surface or pendant mount applications. Suitable for indoor or outdoor use

- Canopy
- Security
- Stairwell
- Corridors

Mounting:

- Fits to any standard junction box or direct to any surface via detachable mounting plate.
- Multiple 1/2" conduit entry plugs
- Included hook for hands-free installation while making electrical connections



Construction:

- Die cast aluminum housing
- Impact resistant, UV-stabilized polycarbonate prismatic lens
- Fade, weather, and abrasion resistant textured polyester powdercoat finish in dark bronze.

Certifications:

- cULus listed for wet locations
- IP65



Ambient Operating Temp.:

- -20°C to 40°C

Predicted L70 Lifetime:

- > 50,000 hrs

Warranty:

- 5 year limited system warranty
- see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: CPE 9 LW UV PPD 840-BZ

Series	Size	Output	Voltage	Shielding	CRI/CCT	Finish
CPE	9	LW	UV	PPD	840	BZ
CPE	9 9' Square	LW Low	UV 120-277V	PPD Prismatic Polycarbonate Drop Lens	840 80 CRI/4000K	BZ Bronze

Photometric Data:


CPE 9 LW UV PPD 840

Test No.: 20160514

Luminaire Lumens: 2219 lm

Luminaire Watts: 23.6W

Efficacy: 94.2 LPW

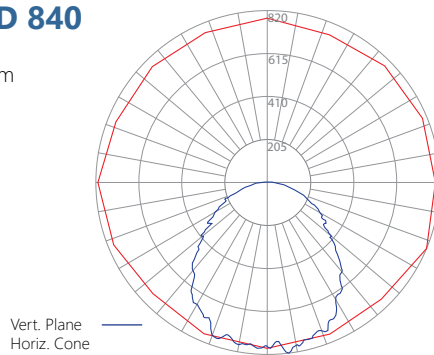

Performance:

Catalog #	Watts	Lumens	LPW
CPE 9 LW UV PPD 840	24	2219	94.2

Schematic:

