



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

DLT 6 | LED 6" Select Down Light

Features:

- High performance LED technology
- 1-10VDC dimming standard
- Works for retrofit and new construction applications
- Type non-IC. Access above ceiling is required.
- 90 CRI
- Field selectable color temperature: 3000K / 3500K / 4000K / 5000K
- Field selectable output: 1000 lm / 1,500 lm / 2,000 lm

Applications:

- Suitable for most commercial, industrial and institutional retrofit & new construction applications
- Retail
 - Hospitality
 - Office

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions

Construction:

- Aluminum housing with smooth white reflector
- Standard (included) junction box can be remote mounted or be attached to the luminaire

Mounting:

- Compatible with 6.25" ceiling cut outs and 6" mounting frames.
- Spring action clips secure fixture to ceiling or existing frame

Certifications:

- cETLus Listed for wet locations
- Complies with EN61000-4-5 surge protection (line neutral, 1kV)
- Complies with FCC Part 15, class A



Predicted L70 Lifetime:

- 56,000 hrs



Ordering Guide:

example: DLT 6 SEL UV SW 9SEL

Series	Size	Output	Voltage	Reflector Trim	CRI/CCT
DLT	6	SEL	UV	SW	9SEL
DLT	6 6"	SEL Field Selectable: Low (1000 lm) Medium (1500 lm) High (2000 lm)	UV 120-277	SW Smooth White	9SEL 90 CRI / Field Selectable CCT: 3000K 3500K 4000K 5000K


Performance Chart:

Selectable Output	Watts	Selectable CCT			
		Lumens 3000K	Lumens 3500K	Lumens 4000K	Lumens 5000K
Low	11	1130	1160	1170	1170
Medium	16	1620	1680	1700	1670
High	23	2170	2280	2300	2250

Photometric Data:

DLT 6 SEL UV SW 9SEL

Test No.: STD201242NB-A
 Luminaire Lumens: 2,138 lm
 Luminaire Watts: 22.0 W
 Efficacy: 97.2 LPW
 Beam Angle: 73°

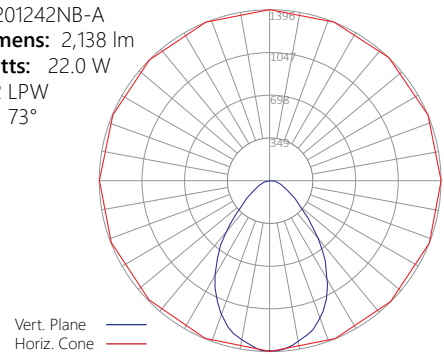

Schematic:

