



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

DSS 4 | LED 4" Slim Select Down Light

Features:

- High performance LED technology
- Dimmable - see compatibility chart on page 2
- Works for retrofit and new construction applications
- Compatible with insulated and non-insulated ceilings
- 90 CRI
- Field selectable color temperature: 2700K / 3000K / 3500K / 4000K / 5000K

Applications:

Suitable for most commercial, industrial and institutional retrofit & new construction applications

- Retail
- Hospitality
- Office

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions

Construction:

- Durable thermoplastic and aluminum construction

Mounting:

- Fits 3" to 4" diameter openings
- Spring action clips secure fixture to ceiling or existing frame

Certifications:

- ETL Listed for wet locations
- IP43
- RoHS compliant



Selectable Color Temp

Predicted L70 Lifetime:

- 50,000 hrs

Ambient Operating Temp:

- -20°C to 40°C




Ordering Guide:

example: DSS 4 MD 12 SW 9SEL

Series	Size	Output	Voltage	Reflector Trim	CRI/CCT
DSS	4	MD	12	SW	9SEL
DSS	4 4"	MD Medium	12 120V	SW Smooth White	9SEL 90 CRI / Field Selectable CCT: 2700K 3000K 3500K 4000K 5000K

Schematic:

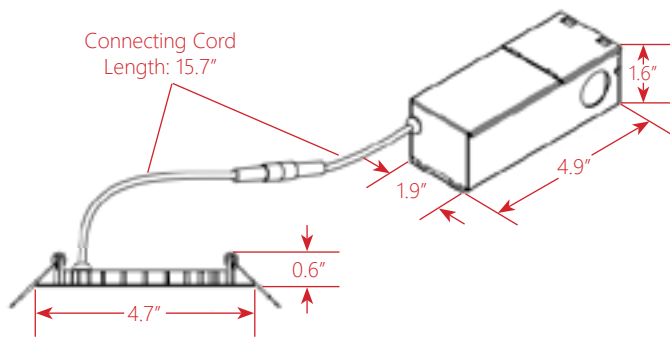


Dimming Compatibility:

Brand	Model	Compatibility
Lutron	4X603	✓
Lutron	CT-603PGH-WH	✗
Lutron	CTCL-153PDH-WH	✓
Lutron	DV-600P	✓
Lutron	DVCL-153P-WH	✓
Lutron	DVLV-603P-IV	✓
Lutron	DVW-603PGH-WH	✓
Lutron	MACL-153M-WH	✓
Lutron	MIR-600THW-WH	✓
Lutron	S-600P	✓
Lutron	S-600PR-WH	✓
Lutron	S-603P	✗
Lutron	SLV-600P-WH	✓
Leviton	6674	✓
Leviton	6631	✓
Leviton	6672	✓
Leviton	6683	✓
Leviton	1A2305	✓
Leviton	1F4205	✗
Leviton	6633-P	✓
Leviton	DB33K1	✓
Leviton	IPL06	✗

Photometric Data:

DSS 4 MD 12 SW 9SEL

Test No.: LCZP19060258
 Luminaire Lumens: 689 lm
 Luminaire Watts: 9.8 W
 Efficacy: 70.4 LPW
 Beam Angle: 112°

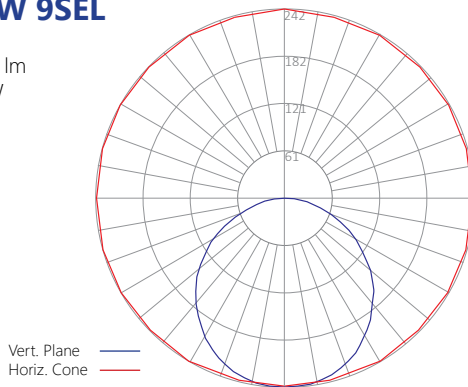

✓ Compatible
 ✗ Not Recommended

