




Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

WPS L | LED Select Wall Pack

Features:

- High performance LED technology
- Type 3 optics for even illumination
- Field selectable color temperature: 3000K /4000K /5000K
- Field selectable output: 80W/90W/100W/120W

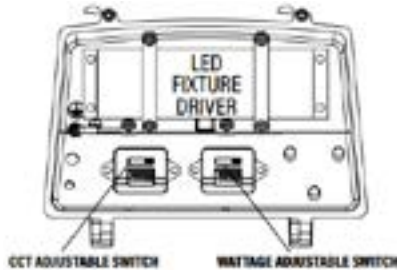

Construction:

- Durable weather resistant, die-cast aluminum housing
- UV resistant polycarbonate optical lens
- Available in white or bronze finish



Certifications:

- ETL Listed for wet locations
- IP65



Predicted L70 Lifetime:

- 50,000 hrs

Ambient Operating Temp:

- -30°C to 45°C



Applications:

- Suitable for most exterior wall mount applications
- Industrial
 - Retail
 - Commercial

Warranty:

- 5 year limited system warranty - see www.LumenFocus.com for complete warranty terms and conditions



Ordering Guide:

example: WPS L SEL 3 UV CP 7SEL-WH


Series	Size	Output	Optic	Voltage	Shielding	CRI/CCT	-	Finish
WPS	L	SEL	3	UV	CP	7SEL	-	
WPS	L Large	SEL Field Selectable: Low (80W) Medium (90W) High (100W) Very High (120W)	3 Type III	UV 120-277	CP Clear Polycarbonate	7SEL 70 CRI / Field Selectable CCT: 3000K 4000K 5000K		WH White Finish BZ Bronze Finish

Accessories: *(order separately)*

- EM-WPS *** Emergency pack: 4W / 90 minute (0°C to 45°C operating temp.)
BPC-WPS * Button Style Photo Cell (120-277V)

* EM & BPC can not be used together. One accessory prevents the other from fitting in the luminaire.

Schematic:

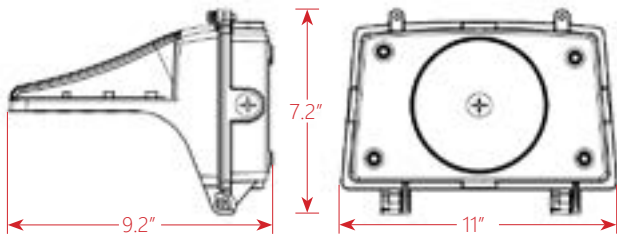

Performance Chart:

Selectable Output	Watts	Lumens	LPW	BUG Rating
Low	80	9638	121.0	B1-U2-G1
Medium	90	10958	121.7	B1-U2-G1
High	98	12111	123.2	B1-U2-G1
Very High	121	14500	120.2	B2-U2-G2

Values in chart reflect 4000K & 5000K color temp.
 Scaling Factor for 3000K: 0.95



Photometric Data:

WPS L SEL 3 UV CP 7SEL (120W)

Luminaire Lumens: 14,499.5 lm

Luminaire Watts: 120.62 W

Efficacy: 120.2 LPW

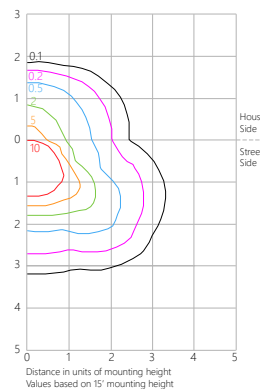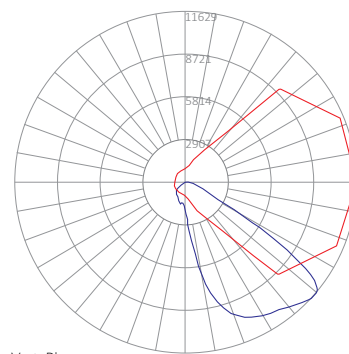

Lum. Classification System (LCS)

LCS Zone	Lumens	%Lum
FL (0-30)	2616.3	18.0
FM (30-60)	7908.4	54.5
FH (60-80)	2051.9	14.2
FVH (80-90)	62.2	0.4
BL (0-30)	586.0	4.0
BM (30-60)	984.5	6.8
BH (60-80)	245.6	1.7
BVH (80-90)	19.8	0.1
UL (90-100)	2.9	0.0
UH (100-180)	21.9	0.2
Total	14499.5	100.0

BUG Rating

B2-U2-G2

