



IES ROAD REPORT

PHOTOMETRIC FILENAME : AMB VL 5S UV 840.IES

DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] R2DG210203051-10
[TESTLAB] BACL
[TESTDATE] 2021-02-04
[ISSUEDATE] 2021-02-09 20:01:53
[LAMPPOSITION] 0,0
[OTHER] EVERFINE GO-R5000_V2 SYSTEM
[MANUFAC] LumenFocus, LLC.
[LUMCAT] AMB VL 5S UV 840
[LAMP] N/A

CHARACTERISTICS


IES Classification	Type VS
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	13365
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	137
Total Luminaire Watts	97.4
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	6926.78
Maximum Candela Angle	45H 28V
Maximum Candela (<90 Degrees Vertical)	6926.78
Maximum Candela Angle (<90 Degrees Vertical)	45H 28V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	101.13 (0.8% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

IES ROAD REPORT
PHOTOMETRIC FILENAME : AMB VL 5S UV 840.IES

LUMINAIRE CLASSIFICATION SYSTEM (LCS)

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	2430.6	N.A.	18.2
FM - Front-Medium (30-60)	4165.8	N.A.	31.2
FH - Front-High (60-80)	227.2	N.A.	1.7
FVH - Front-Very High (80-90)	15.8	N.A.	0.1
BL - Back-Low (0-30)	2147.2	N.A.	16.1
BM - Back-Medium (30-60)	4120.9	N.A.	30.8
BH - Back-High (60-80)	241.3	N.A.	1.8
BVH - Back-Very High (80-90)	16.5	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	13365.3	N.A.	100.0
BUG Rating	B3-U0-G1		


COEFFICIENTS OF UTILIZATION

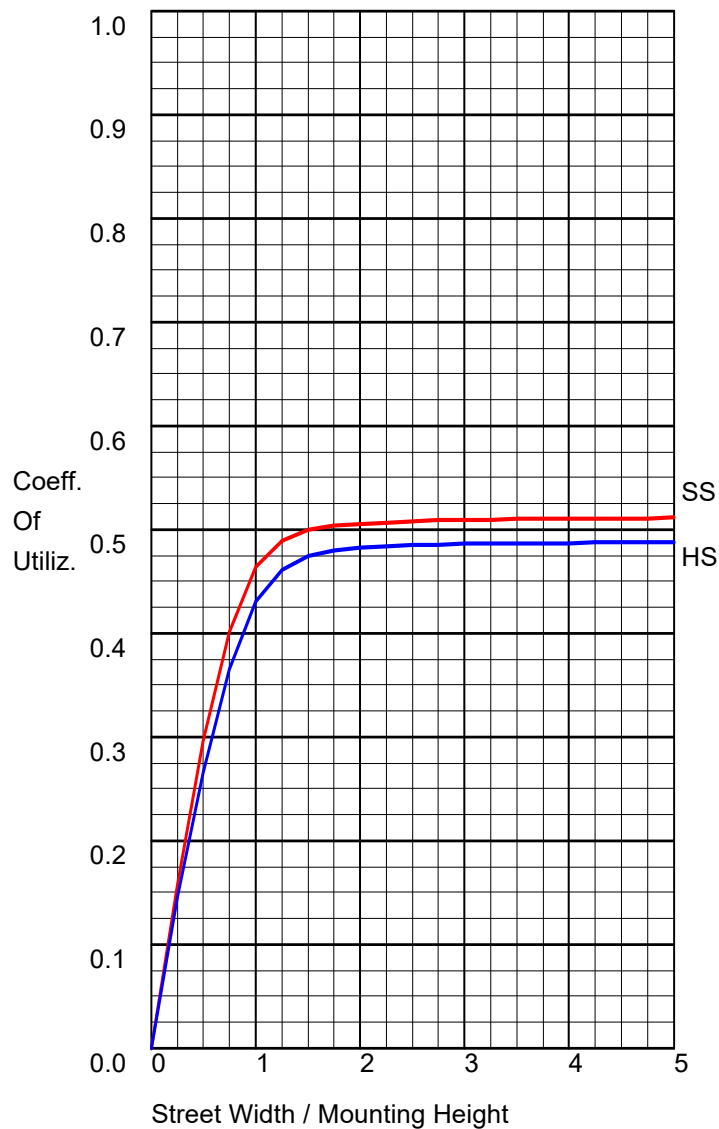

FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	6839.3	51.2
Downward House Side	6525.9	48.8
Downward Total	13365.2	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	13365.2	100.0

POLAR GRAPH

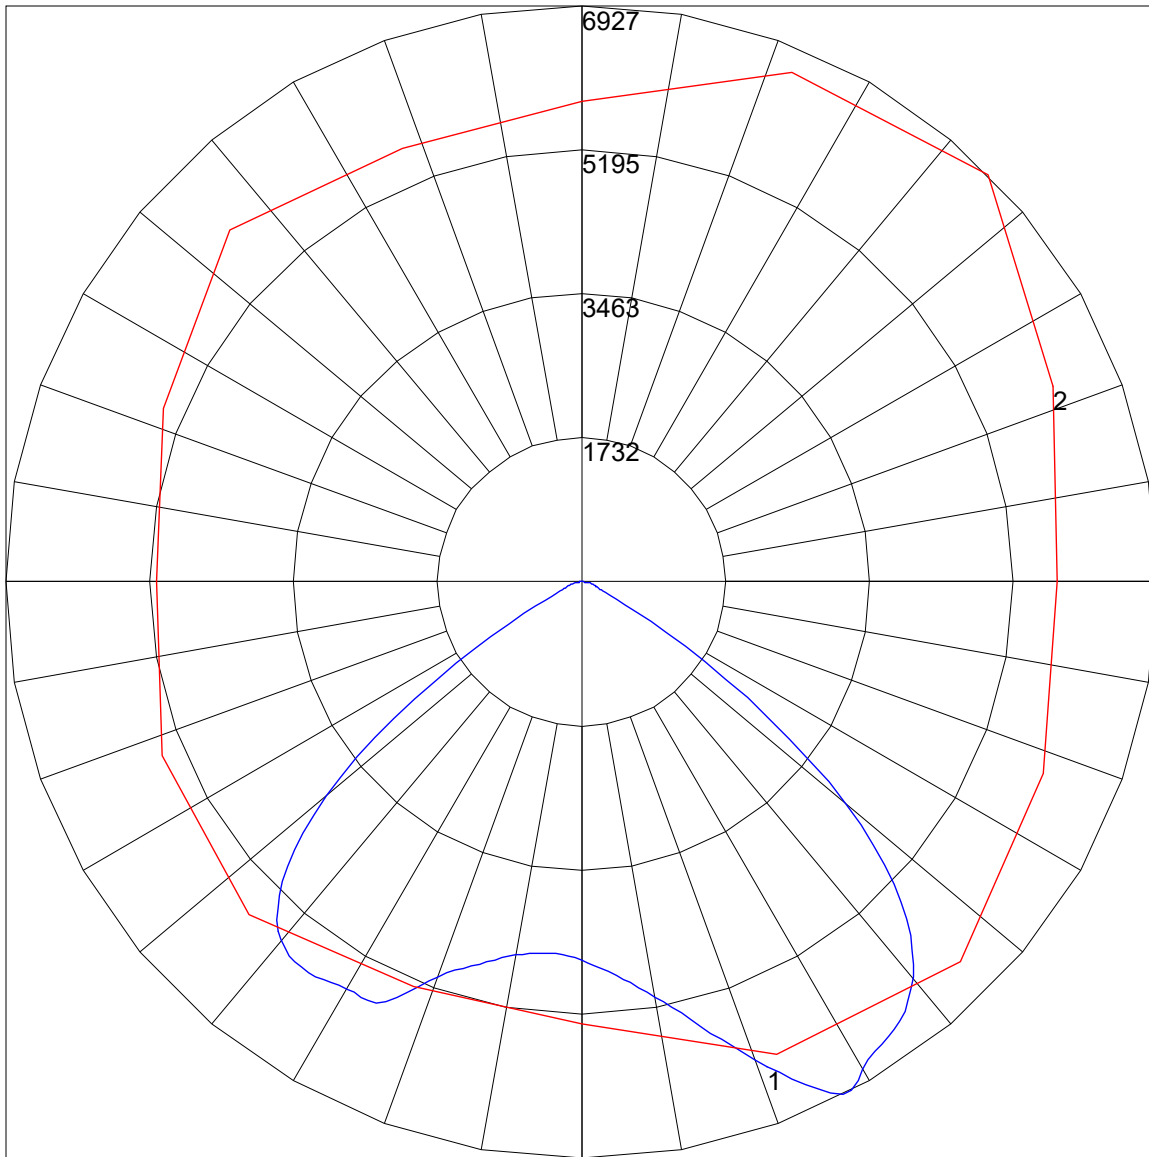


Maximum Candela = 6926.78 Located At Horizontal Angle = 45, Vertical Angle = 28
1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (28) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

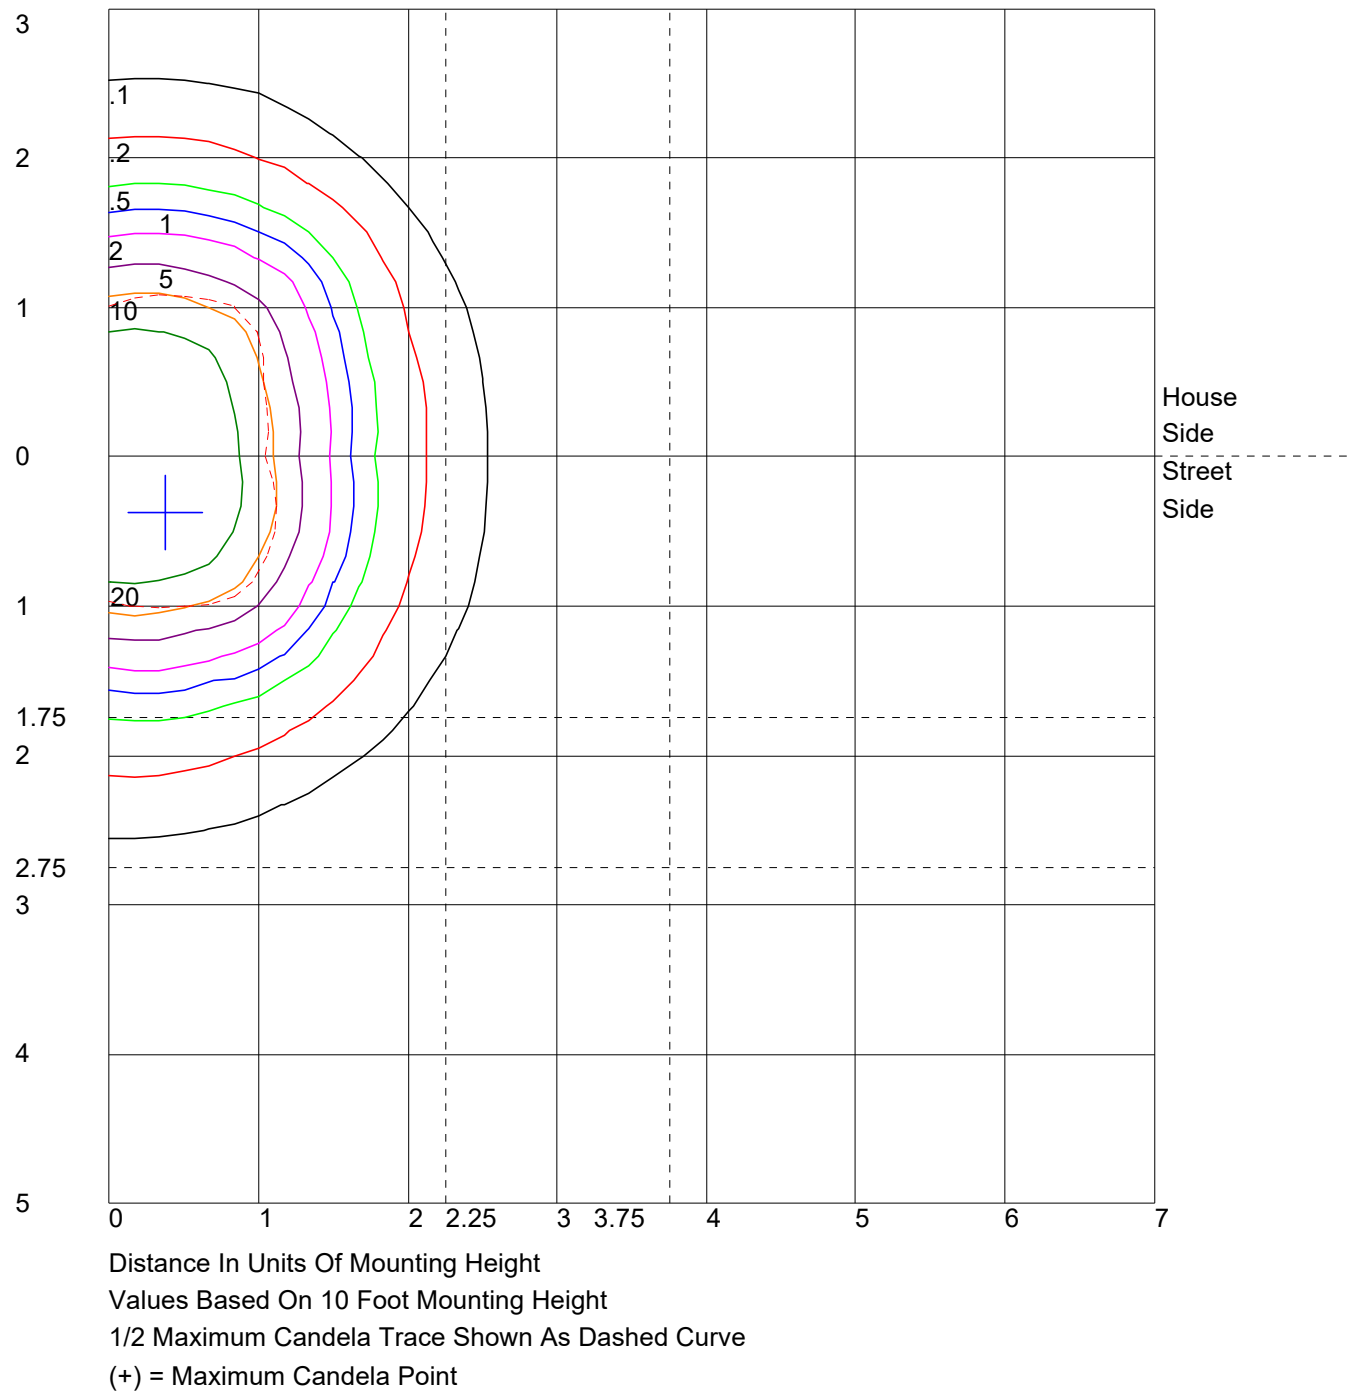

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

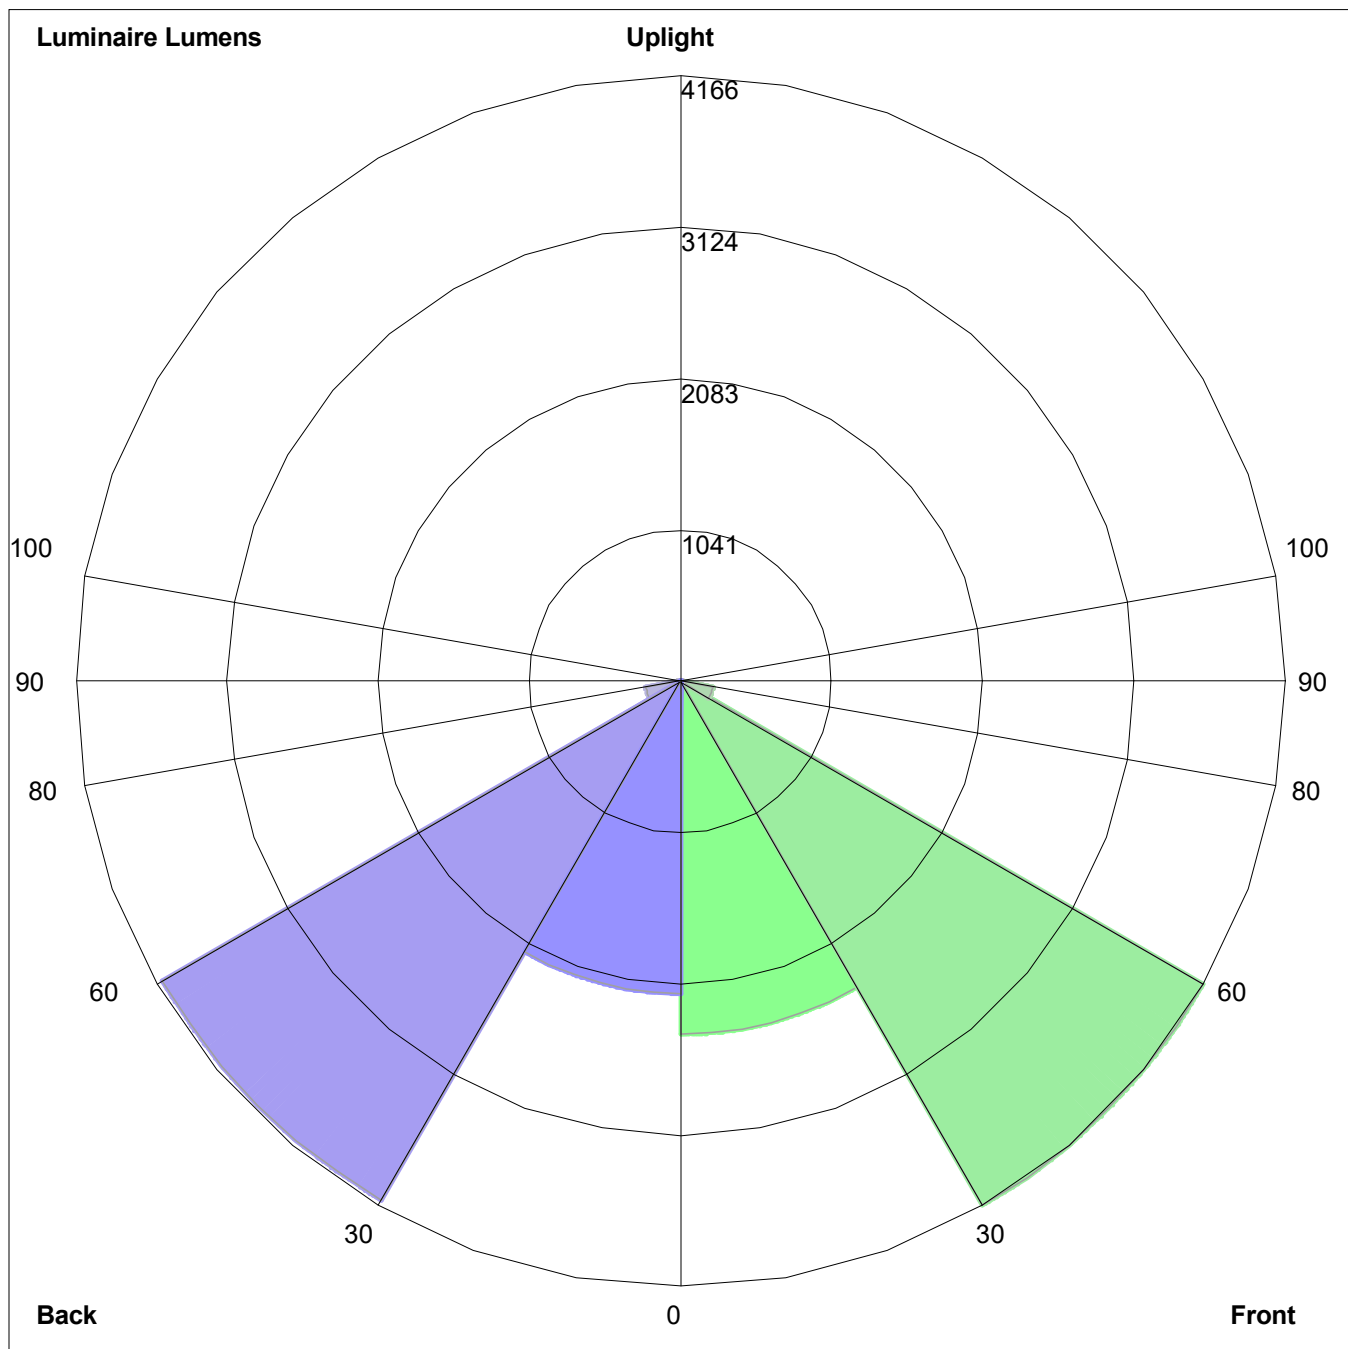

Luminaire Lumens:
Front: Low=2430.6, Medium=4165.8, High=227.2, Very High=15.8
Back: Low=2147.2, Medium=4120.9, High=241.3, Very High=16.5
Uplight: Low=0.0, High=0.0

BUG Rating : B3-U0-G1