

## IES ROAD REPORT

PHOTOMETRIC FILENAME : AMB HI 5S UV 840.IES

### DESCRIPTIVE INFORMATION (From Photometric File)

IESNA:LM-63-2002  
[TEST] R2DG210203055-10  
[TESTLAB] BACL  
[TESTDATE] 2021-02-03  
[ISSUEDATE] 2021-02-05 22:18:58  
[LAMPPOSITION] 0,0  
[OTHER] EVERFINE GO-R5000\_V2 SYSTEM  
[MANUFAC] LumenFocus, LLC.  
[LUMCAT] AMB HI 5S UV 840  
[LAMP] N/A

### CHARACTERISTICS


IES Classification	Type VS
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	31403
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	139
Total Luminaire Watts	226.6
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	14185.2
Maximum Candela Angle	315H 33V
Maximum Candela (<90 Degrees Vertical)	14185.2
Maximum Candela Angle (<90 Degrees Vertical)	315H 33V
Maximum Candela At 90 Degrees Vertical	0 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	161.41 (0.5% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

**IES ROAD REPORT**  
**PHOTOMETRIC FILENAME : AMB HI 5S UV 840.IES**

**LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	5335.4	N.A.	17.0
FM - Front-Medium (30-60)	10341.9	N.A.	32.9
FH - Front-High (60-80)	559.6	N.A.	1.8
FVH - Front-Very High (80-90)	27.3	N.A.	0.1
BL - Back-Low (0-30)	5000.0	N.A.	15.9
BM - Back-Medium (30-60)	9614.5	N.A.	30.6
BH - Back-High (60-80)	498.6	N.A.	1.6
BVH - Back-Very High (80-90)	25.8	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	31403.1	N.A.	100.0
BUG Rating	B5-U0-G1		


### COEFFICIENTS OF UTILIZATION

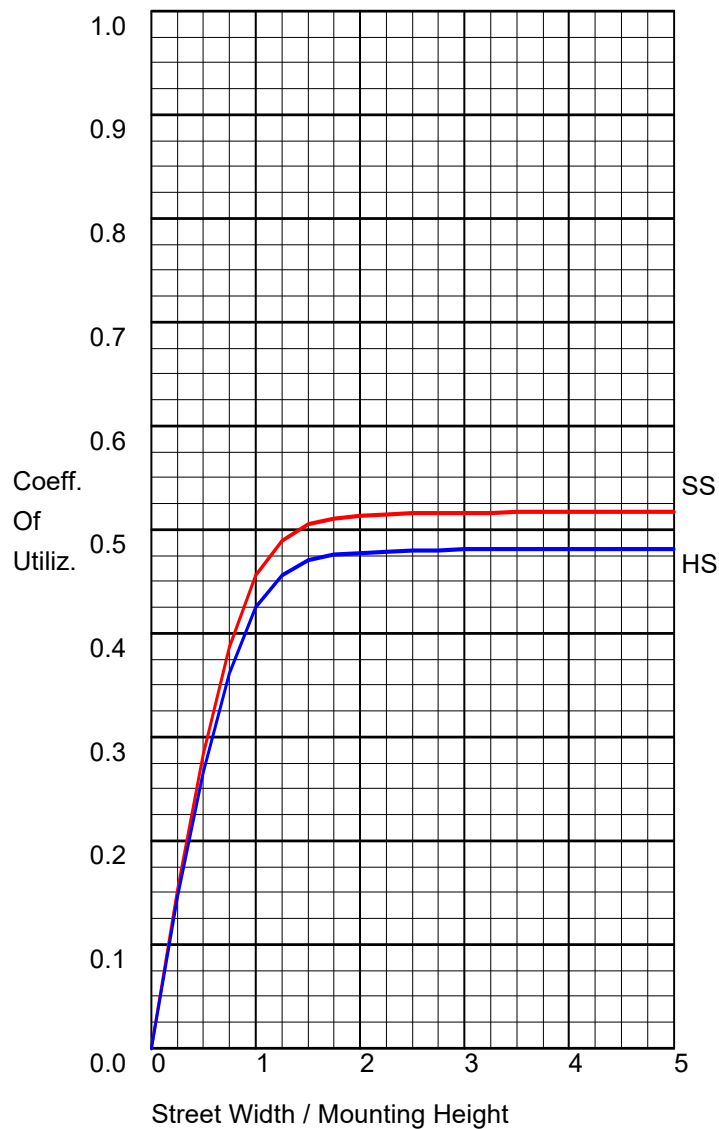

### FLUX DISTRIBUTION


	Lumens	Percent Of Luminaire
Downward Street Side	16264.2	51.8
Downward House Side	15138.8	48.2
Downward Total	31403.0	100.0
Upward Street Side	0.0	0.0
Upward House Side	0.0	0.0
Upward Total	0.0	0.0
Total Flux	31403.0	100.0

POLAR GRAPH

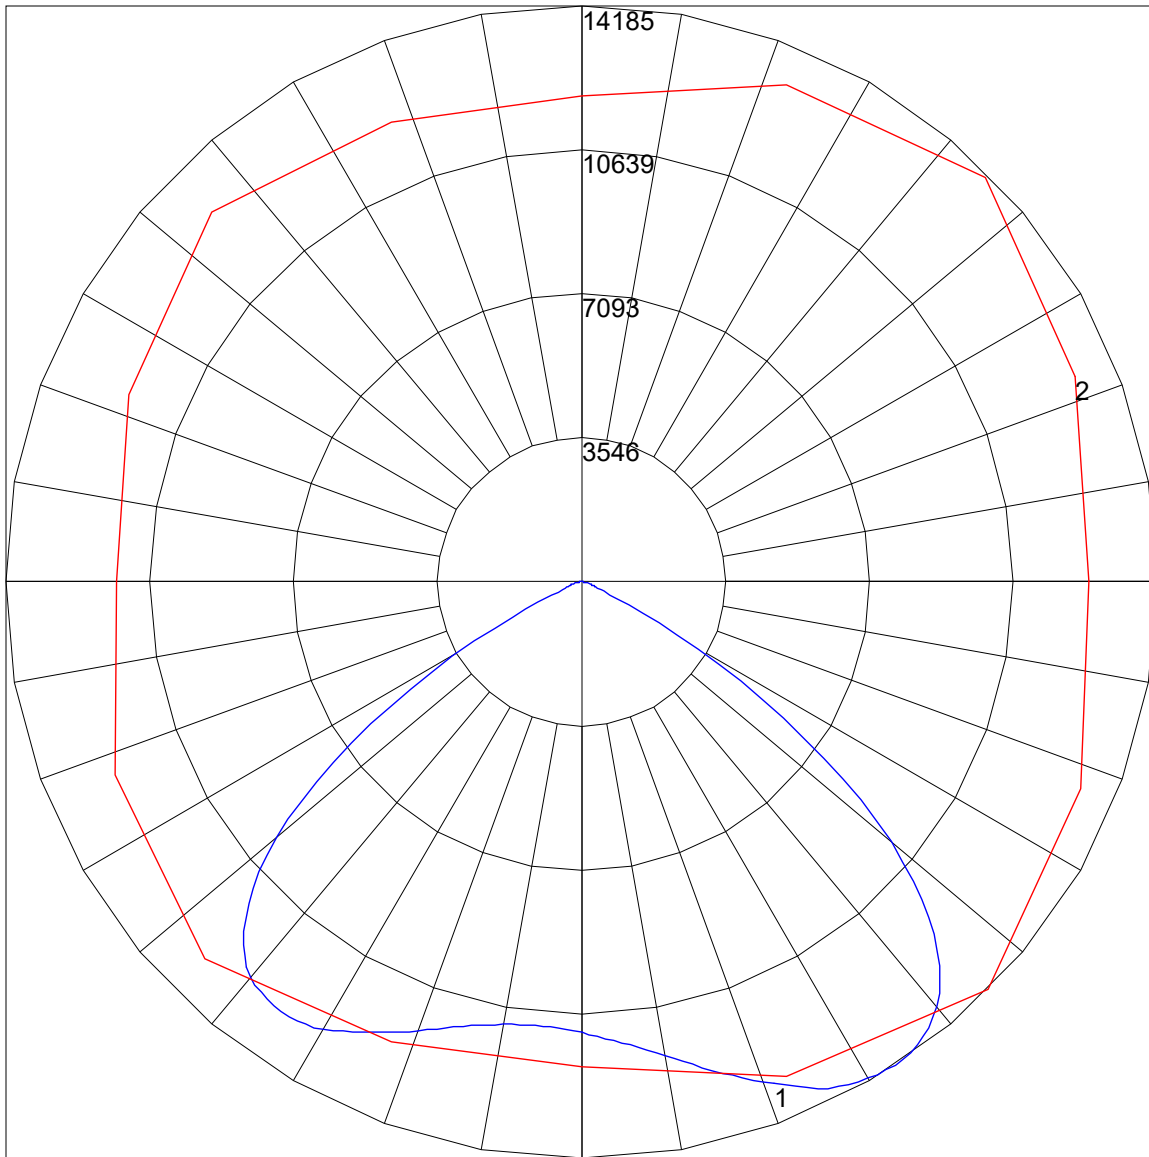


Maximum Candela = 14185.2 Located At Horizontal Angle = 315, Vertical Angle = 33  
# 1 - Vertical Plane Through Horizontal Angles (315 - 135) (Through Max. Cd.)  
# 2 - Horizontal Cone Through Vertical Angle (33) (Through Max. Cd.)

ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

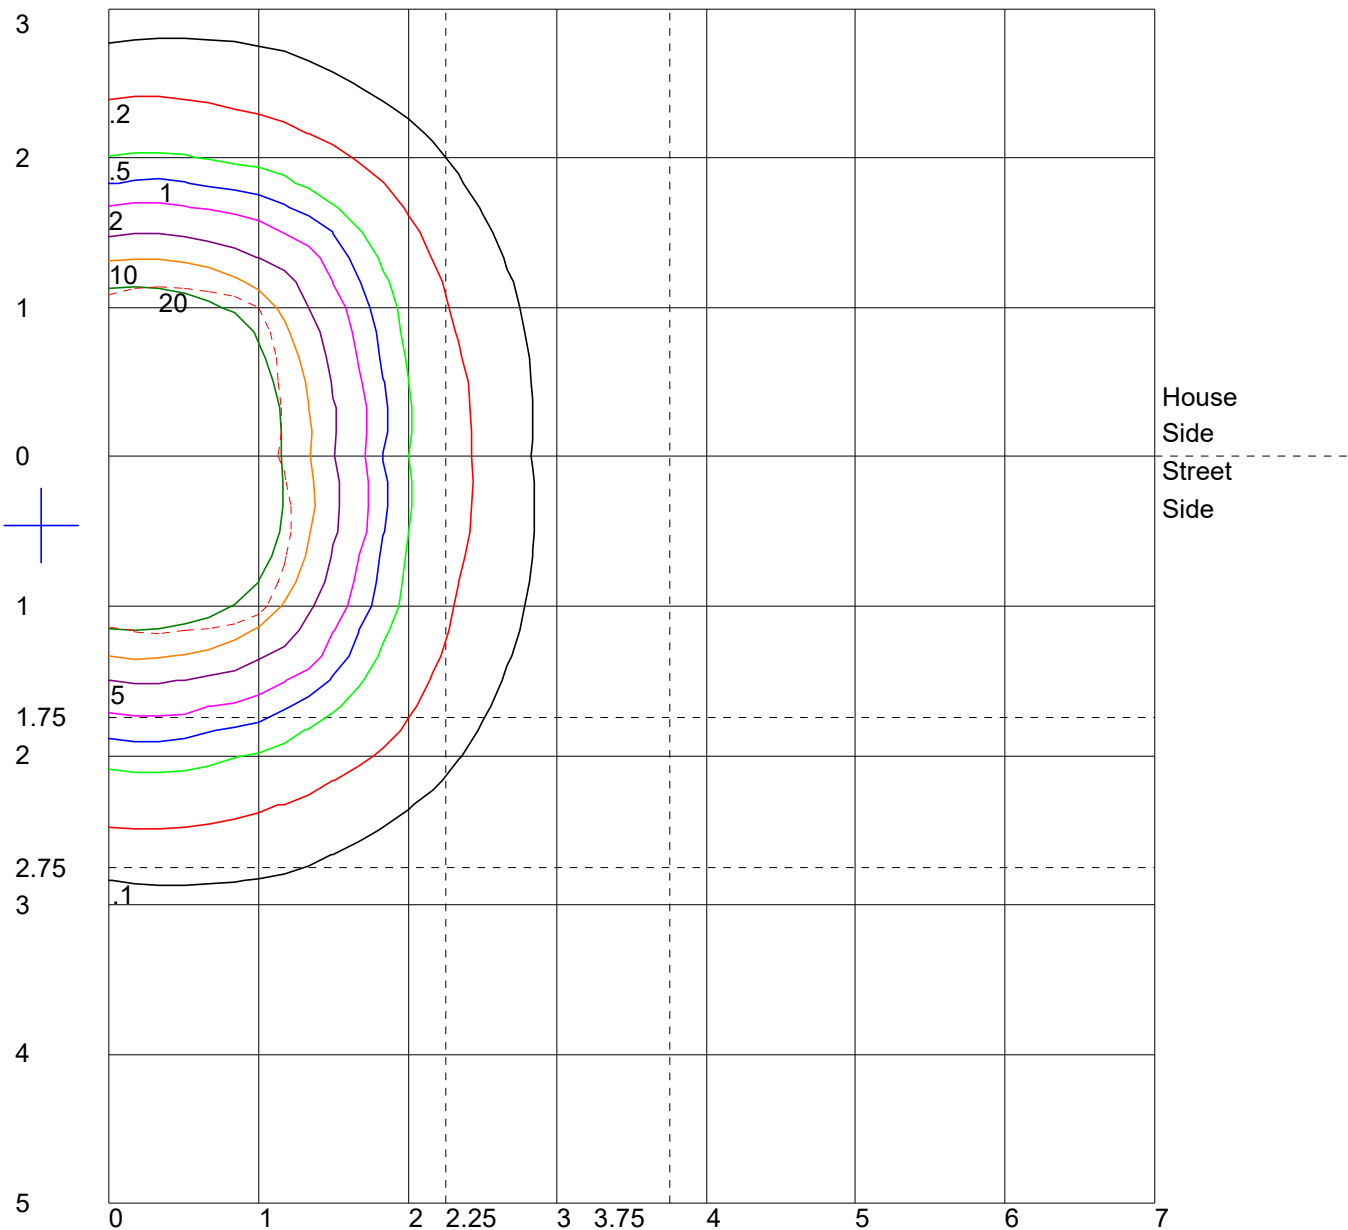

Distance In Units Of Mounting Height  
 Values Based On 10 Foot Mounting Height  
 1/2 Maximum Candela Trace Shown As Dashed Curve  
 (+) = Maximum Candela Point

LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH

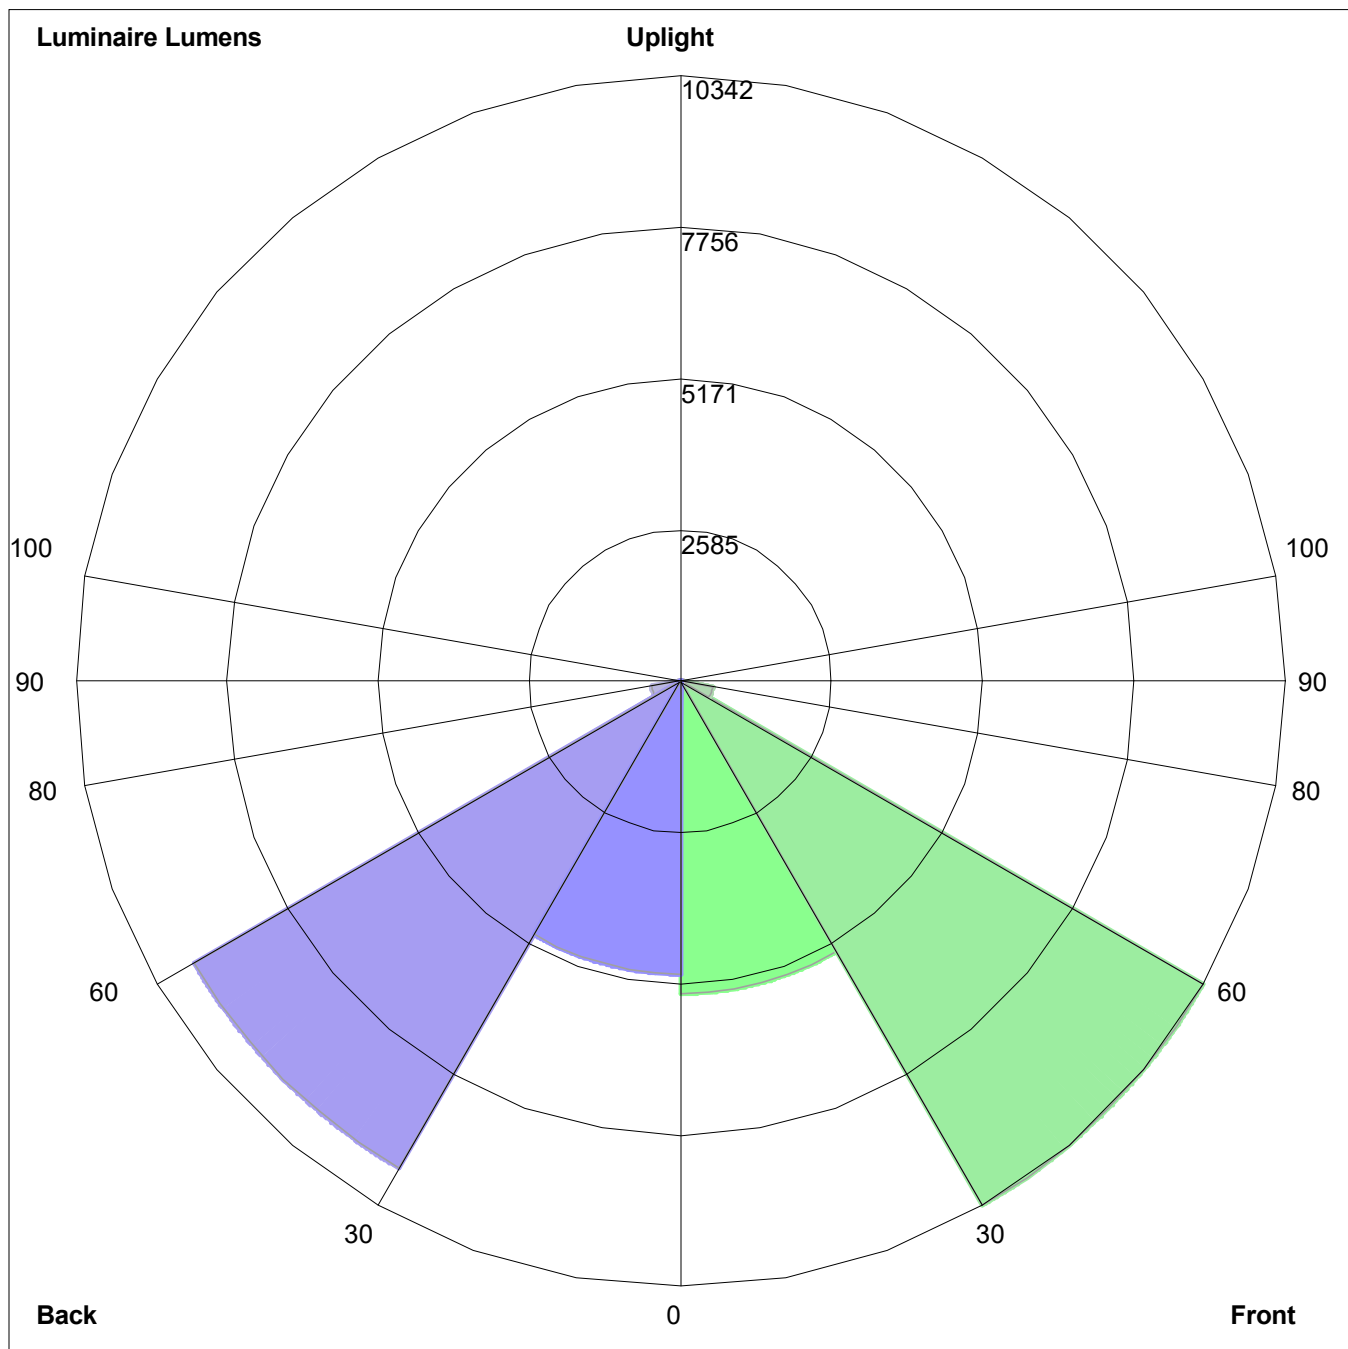

Luminaire Lumens:  
Front: Low=5335.4, Medium=10341.9, High=559.6, Very High=27.3  
Back: Low= 5000.0, Medium=9614.5, High=498.6, Very High=25.8  
Uplight: Low=0.0, High=0.0

BUG Rating : B5-U0-G1