



Project: _____
 Location: _____
 Cat. #: _____
 Type: _____
 Quantity: _____

LED

PBL G2 2W | Premium LED High Bay

Features:

- High performance LED technology
- 0-10V dimming drivers standard on all models - dimmable to <10% on all models, with most dimmable to 1%
- DALI drivers available based on configuration
- Field replaceable LED boards and drivers through Re-boardABILITY (more info on Page 3)
- Frosted diffusers available to help minimize glare and improve aesthetics
- A wide variety of lumen packages allows for flexibility in design and helps maximize energy savings
- Multiple controls options available
- The PBL G2's unibody design is surface mountable with easy access to the driver compartment from below

Applications:

Suitable for most commercial, industrial and institutional applications

- Retail
- Warehouse
- Manufacturing
- Cold/Frozen Storage *(cold temperature rules apply. Refer to warranty document at www.lumenfocus.com/support for details)*

Ambient Operating Temp.:

- -30°C to 50°C

Construction:

- Housing and LED tray is precision brake formed from aluminum
- Pre-painted with a highly durable, highly reflective white finish

Certifications:

- UL 1598 listed for US and Canada, suitable for damp locations
- DesignLights Consortium qualified on specific configurations (refer to DLC qualified products list for exact model numbers) <http://designlights.org/>



Predicted Lifetime:

- L70: 172,000 hrs (calculated)
- L80: 106,000 hrs (calculated)
- L90: 48,000 hrs (reported)
- 86% lumen maintenance @ 72,000 hrs *(based on LM-80, TM-21 and in-situ laboratory testing)*

Warranty:

- 5 year limited system warranty -see www.LumenFocus.com for complete warranty terms and conditions
- 10 year warranty option available on specific models *(Not available on all models. Certain conditions apply. Consult factory or sales representative for details)*



Ordering Guide:

example: PBL G2 2W HI UV 850 QC20 C6

| Series | Length | Output | Performance | Voltage | Shielding | CRI/CCT | Hanging | Controls | Options | Finish |
|--|----------|-------------------|--|----------------|------------------------------------|-------------------------------------|--|--|---|-------------------|
| PBL G2 | 2W | | | | | | | | | |
| PBL G2 Gen 2 Premium High Bay | 2W 2' | HI High | Blank Standard | UV 120-277V | Blank No Lenses | 835 80 CRI/3500K | Blank None | Blank No Controls | Blank No Options | Blank White |
| | | | HE High Efficiency (Available in HI model only) | 34 347V | FR Frosted Acrylic Diffusers | 840 80 CRI/4000K | QC 10' Quick Hang Cable Kit | ZOS Occupancy Sensor (On/Off) | EXT10 10-Year Extended Warranty ⁽⁶⁾ | BK Matte Black |
| | | Blank Standard | 48 480V | | 850 80 CRI/5000K | QC20 20' Quick Hang Cable Kit | ZOSD Occupancy Sensor (On/Off/Dim) | C6 6' Single Circuit Cord | SL Metallic Silver | |
| | | VH Very High | | | | | | ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽¹⁾ | C65W 6' Single Circuit Cord with Low Voltage Connections | |
| | | SH Super High | | | | | | ZOFDU Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping, Scheduling (120-480V) ⁽¹⁾ | C10 10' Single Circuit Cord | |

Notes

- ⁽¹⁾ For 8' to 40' mounting heights. See Page 5 for more details.
- ⁽²⁾ " _ " = lens type. See Page 5 for lens descriptions.
- ⁽³⁾ Max ceiling height is 50 feet. See page 5 for more details.
- ⁽⁴⁾ Max ceiling height for Douglas FMS sensor: 40 feet. See Page 6 for more details on advanced controls.
- ⁽⁵⁾ Max ceiling height for Enlighted Ruggedized sensor 50 feet. See Page 6 for more details on advanced controls.
- ⁽⁶⁾ Not available on all models. Certain conditions apply. Consult factory or sales representative for details.
- ⁽⁷⁾ EM2 - Up to 16W, 120-277V / 0°C-50°C ambient.

Accessories (order separately)

- WG(PBL2W) Wire Guard
- WGE(PBL2W) Extended Wire Guard for use with end-mounted sensor

Controls Accessories (order separately)

For Douglas Controls

- BT-DMSW-U-A Bluetooth 1 Zone Dimmer
- BT-4BTSW-U-A Bluetooth 4-Button Wall Station
- BT-8BTSW-U-A Bluetooth 8-Button Wall Station

For Enlighted Controls

- WS-2-00 Enlighted Remote Control Wall Switch (for Enlighted Connected & IoT)
- WS-2-00-IL Enlighted Remote Control Wall Switch (for Enlighted One)

For Z221BL_ Sensor

- FSIR-100 Wireless Configuration Tool

For ZOSMHB Sensor

- ZLSOR Wireless Configuration Tool

| | |
|--|---|
| ZOFD1 Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping (120-277V) ⁽¹⁾ | C65W 6' Single Circuit Cord with Low Voltage Connections |
| ZOFDU Leviton Bluetooth-enabled Programmable Dimming/ Occupancy/Daylight Harvesting Sensor with Grouping, Scheduling (120-480V) ⁽¹⁾ | C10 10' Single Circuit Cord |
| Z221BL_ Wattstopper Programmable Photo/Motion Multi-Voltage Sensor (high/low/off) ⁽²⁾ | C105W 10' Single Circuit Cord with Low Voltage Connections |
| Z321BL_ Wattstopper Bluetooth- enabled Programmable Dimming/Occupancy/ Daylight Harvesting Multi- Voltage Sensor ⁽²⁾ | D6 6' Dual Circuit Cord |
| ZOSMHB Leviton High Bay Microwave 0-10V Multi-Level Occupancy Sensor with Photocell ⁽³⁾ | D10 10' Dual Circuit Cord |
| ZPC Photocell | P(NEMA) Plug (Specify NEMA configuration) |
| ZFMS Douglas FMS Sensor with Dimming/Occupancy/ Daylight Harvesting with Nework Capabilities ⁽⁴⁾ | SC Safety Cable |
| ZENLO Enlighted Ruggedized Sensor with Dimming/Occupancy/ Daylight Harvesting and Enlighted One System ⁽⁵⁾ | F Fuse |
| ZENLC Enlighted Ruggedized Sensor with Dimming/Occupancy/ Daylight Harvesting and Enlighted Connected System ⁽⁵⁾ | EM2 Emergency Pack ⁽⁷⁾ |
| ZENLI Enlighted Ruggedized Sensor with Dimming/Occupancy/ Daylight Harvesting and Enlighted IoT System ⁽⁵⁾ | SDT(480V) 480V to 277V Step Down Transformer |
| | CC Conformal Coating |
| | LVL 0-10V Dimming Leads for Easy Field Access |
| | BAA Buy American Act Compliant |





Performance Chart:

| Catalog # | Lumens | Watts | LPW | Catalog # | Lumens | Watts | LPW | Catalog # | Lumens | Watts | LPW |
|---------------------------|--------|-------|-------|---------------------------|--------|-------|-------|---------------------------|--------|-------|-------|
| PBL G2 2W HI HE UV 835 | 17164 | 99 | 173.3 | PBL G2 2W HI HE UV 840 | 17779 | 99 | 179.5 | PBL G2 2W HI HE UV 850 | 17779 | 99 | 179.5 |
| PBL G2 2W HI UV 835 | 17257 | 104 | 166.4 | PBL G2 2W HI UV 840 | 17876 | 104 | 172.4 | PBL G2 2W HI UV 850 | 17876 | 104 | 172.4 |
| PBL G2 2W VH UV 835 | 19461 | 117 | 166.0 | PBL G2 2W VH UV 840 | 20159 | 117 | 171.9 | PBL G2 2W VH UV 850 | 20159 | 117 | 171.9 |
| PBL G2 2W SH UV 835 | 23458 | 142 | 164.6 | PBL G2 2W SH UV 840 | 24299 | 142 | 170.5 | PBL G2 2W SH UV 850 | 24299 | 142 | 170.5 |
| PBL G2 2W HI HE UV FR 835 | 16131 | 99 | 162.9 | PBL G2 2W HI HE UV FR 840 | 16709 | 99 | 168.7 | PBL G2 2W HI HE UV FR 850 | 16709 | 99 | 168.7 |
| PBL G2 2W HI UV FR 835 | 16224 | 104 | 156.4 | PBL G2 2W HI UV FR 840 | 16805 | 104 | 162.0 | PBL G2 2W HI UV FR 850 | 16805 | 104 | 162.0 |
| PBL G2 2W VH UV FR 835 | 18295 | 117 | 156.0 | PBL G2 2W VH UV FR 840 | 18951 | 117 | 161.6 | PBL G2 2W VH UV FR 850 | 18951 | 117 | 161.6 |
| PBL G2 2W SH UV FR 835 | 22042 | 142 | 155.0 | PBL G2 2W SH UV FR 840 | 22832 | 142 | 160.5 | PBL G2 2W SH UV FR 850 | 22832 | 142 | 160.5 |

Lumen Adjustment Factors: WG: 0.95

Schematic:

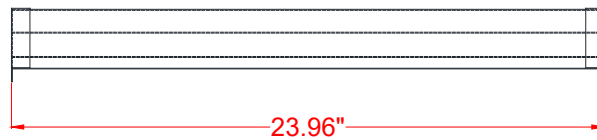

LUMENFOCUS
Re-boardABILITY

The PBL G2 features field replaceable boards and drivers. This allows you to upgrade to more efficient technology in the future. Or, in the rare event of a failure, you can rapidly replace defective components. Re-boardABILITY helps to ensure you won't get stuck with an obsolete light fixture. [Learn more about Re-boardABILITY here.](#)



[Click here for a video demonstration of the re-boarding process on a PBL.](#)
Note: Exact time varies depending on the model.




Photometric Data:

PBL G2 2W SH UV 835

Test No.: LLIA001249-003
 Luminaire Lumens: 23,458 lm
 Luminaire Watts: 142.5W
 Efficacy: 164.6 LPW
 Spacing Criterion (0-180): 1.30
 Spacing Criterion (90-270): 1.28

| Luminance Data (cd/sq.m) | | | |
|--------------------------|---------------|----------------|----------------|
| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
| 45 | 34164 | 33914 | 33908 |
| 55 | 33163 | 33148 | 33328 |
| 65 | 30168 | 31125 | 32021 |
| 75 | 24381 | 27439 | 23235 |
| 85 | 9822 | 9476 | 10858 |

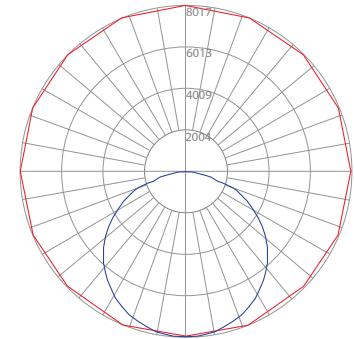

— Vert. Plane
 — Horiz. Cone

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|--------|---------|-------|
| 0-20 | 2930.9 | 12.5 |
| 0-30 | 6261.2 | 26.7 |
| 0-40 | 10338.0 | 44.1 |
| 0-60 | 18583.9 | 79.2 |
| 0-80 | 23174.8 | 98.8 |
| 0-90 | 23454.0 | 100.0 |
| 90-120 | 3.9 | 0.0 |
| 90-130 | 3.9 | 0.0 |
| 90-150 | 3.9 | 0.0 |
| 90-180 | 3.9 | 0.0 |
| 0-180 | 23457.9 | 100.0 |

Coefficients Of Utilization - Zonal Cavity Method
 Effective Floor Cavity Reflectance 0.20


| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | | | |
| 1 | 109 | 104 | 100 | 96 | 106 | 102 | 98 | 95 | 98 | 95 | 92 | 94 | 91 | 89 | | | |
| 2 | 99 | 91 | 84 | 78 | 96 | 89 | 83 | 77 | 85 | 80 | 75 | 82 | 78 | 74 | | | |
| 3 | 90 | 79 | 71 | 65 | 88 | 78 | 70 | 64 | 75 | 68 | 63 | 72 | 67 | 62 | | | |
| 4 | 82 | 70 | 61 | 55 | 80 | 69 | 61 | 54 | 66 | 59 | 54 | 64 | 58 | 53 | | | |
| 5 | 76 | 63 | 54 | 47 | 74 | 62 | 53 | 47 | 59 | 52 | 46 | 57 | 51 | 46 | | | |
| 6 | 70 | 56 | 47 | 41 | 68 | 55 | 47 | 41 | 54 | 46 | 40 | 52 | 45 | 40 | | | |
| 7 | 65 | 51 | 42 | 36 | 63 | 50 | 42 | 36 | 49 | 41 | 36 | 47 | 40 | 35 | | | |
| 8 | 60 | 46 | 38 | 32 | 59 | 46 | 38 | 32 | 44 | 37 | 32 | 43 | 36 | 31 | | | |
| 9 | 56 | 43 | 34 | 29 | 55 | 42 | 34 | 29 | 41 | 34 | 28 | 40 | 33 | 28 | | | |
| 10 | 53 | 39 | 31 | 26 | 51 | 39 | 31 | 26 | 38 | 31 | 26 | 37 | 30 | 26 | | | |

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08

PBL G2 2W SH UV FR 835

Test No.: LLIA001249-002A
 Luminaire Lumens: 22,042 lm
 Luminaire Watts: 142.3W
 Efficacy: 155.0 LPW
 Spacing Criterion (0-180): 1.24
 Spacing Criterion (90-270): 1.28

| Luminance Data (cd/sq.m) | | | |
|--------------------------|---------------|----------------|----------------|
| Angle In Degrees | Average 0-Deg | Average 45-Deg | Average 90-Deg |
| 45 | 29407 | 31438 | 32685 |
| 55 | 25611 | 30095 | 32308 |
| 65 | 20794 | 28540 | 32133 |
| 75 | 15573 | 27340 | 25578 |
| 85 | 9624 | 19841 | 19446 |

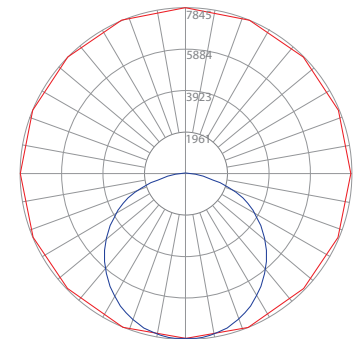

— Vert. Plane
 — Horiz. Cone

Zonal Lumen Summary

| Zone | Lumens | %Fixt |
|--------|---------|-------|
| 0-20 | 2861.1 | 13.0 |
| 0-30 | 6072.5 | 27.5 |
| 0-40 | 9929.1 | 45.0 |
| 0-60 | 17404.4 | 79.0 |
| 0-80 | 21600.3 | 98.0 |
| 0-90 | 22027.0 | 99.9 |
| 90-120 | 15.4 | 0.1 |
| 90-130 | 15.4 | 0.1 |
| 90-150 | 15.4 | 0.1 |
| 90-180 | 15.4 | 0.1 |
| 0-180 | 22042.3 | 100.0 |

Coefficients Of Utilization - Zonal Cavity Method
 Effective Floor Cavity Reflectance 0.20

| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | |
|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|----|
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | | | |
| 1 | 109 | 104 | 100 | 96 | 106 | 102 | 98 | 94 | 97 | 94 | 91 | 93 | 91 | 88 | | | |
| 2 | 99 | 91 | 84 | 78 | 96 | 89 | 82 | 77 | 85 | 80 | 75 | 82 | 77 | 73 | | | |
| 3 | 90 | 79 | 71 | 65 | 88 | 78 | 70 | 64 | 75 | 68 | 63 | 72 | 67 | 62 | | | |
| 4 | 82 | 70 | 62 | 55 | 80 | 69 | 61 | 54 | 67 | 59 | 54 | 64 | 58 | 53 | | | |
| 5 | 76 | 63 | 54 | 47 | 74 | 62 | 53 | 47 | 60 | 52 | 46 | 58 | 51 | 46 | | | |
| 6 | 70 | 57 | 48 | 41 | 68 | 56 | 47 | 41 | 54 | 46 | 41 | 52 | 45 | 40 | | | |
| 7 | 65 | 51 | 43 | 36 | 63 | 51 | 42 | 36 | 49 | 41 | 36 | 48 | 41 | 36 | | | |
| 8 | 60 | 47 | 38 | 32 | 59 | 46 | 38 | 32 | 45 | 37 | 32 | 44 | 37 | 32 | | | |
| 9 | 56 | 43 | 35 | 29 | 55 | 42 | 35 | 29 | 41 | 34 | 29 | 40 | 34 | 29 | | | |
| 10 | 53 | 40 | 32 | 26 | 52 | 39 | 32 | 26 | 38 | 31 | 26 | 37 | 31 | 26 | | | |

Tested in accordance with IES standards utilizing absolute photometry per LM-79-08



Controls Summary:

| Control Code | Type | Capabilities | Communication |
|--------------|-------------------------------------|--|---|
| ZOS | Motion (PIR) | On/Off | Wired |
| ZOSD | Motion (PIR), Photosensor | On/Low/Off | Wired 1-10V |
| ZOFD1 | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |
| ZOFDU | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |
| Z221BLx | Motion (PIR), Photosensor | High/Low/Off, High-End Trim | Wired 0-10V, Programmable via IR remote (sold separately) |
| Z321BLx | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim | Wired 0-10V, Programmable via Bluetooth App (iOS, Android) |
| ZOSMHB | Motion (Microwave), Photosensor | On/Low/Off | Wired 0-10V, Programmable via ZLS0R IR remote (sold separately) |
| ZPC | Photosensor | On/Off | Wired |
| ZFMS | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, LLLC (Douglas Lighting Controls-Dialog)* | Wireless Bluetooth Mesh, Programmable via iOS App or Douglas Dialog Software |
| ZENLO | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Upgradable to Connected (ZENLC or IoT (ZENLI)) | Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted Room Controller WS-2-00-IL (sold separately) |
| ZENLC | Motion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, Upgradable to IoT (ZENLI), LLLC (Enlighted IoT)* | Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software |
| ZENLI | MoMotion (PIR), Daylight Harvesting | High/Low/Off, High-End Trim, Grouping, Scheduling*, Energy Monitoring*, BMS Integration*, LLLC (Enlighted IoT)*, Space - Building Utilization*, Where - Real Time Location Services* | Wireless Bluetooth Low Energy Mesh, Programmable via Enlighted IoT Software |

LLLC = Luminaire Level Lighting Control

* Additional equipment required. Contact LumenFocus representative for details

Programmable Dimming Sensors:

ZOFDx Sensor Option

- Leviton Smart IP66 passive infrared (PIR) sensors
- Features mesh grouping (16 devices per group), occupancy sensing, daylight harvesting, scheduling (for ZOSFDU only), single-level switching
- Comes pre-installed on the end cap
- Rated for cold locations
- Configurable through the Leviton Smart Sensor App using a smartphone or other Bluetooth-enabled iOS or Android device



The ZOFD option includes four sensor lenses that can easily be installed or swapped out in the field. From left: the high bay lens (20'-40' mounting), the high bay lens with aisleway mask, the low bay lens (8'-20' mounting), and the low bay lens with aisleway mask.



FSP with L7 lens

FSIR-100

Z221B, Z321B Sensor Options

- The Wattstopper FSP sensor provides multi-level control based on motion and/or daylight contribution
- Comes pre-installed on the end cap
- Rated for cold locations
- Parameters for Bluetooth-enabled Z321B adjustable via phone app - iOS or Android
- Parameters for Z221B adjustable via wireless configuration tool (FSIR-100 - sold separately)
- Three lenses available, tailored for the ideal detection area and mounting height:
 - **L2:** 360° lens, maximum coverage 48', diameter from 8' height
 - **L3:** 360° lens, maximum coverage 40', diameter from 20' height
 - **L7:** 360° lens, maximum coverage 100', diameter from 40' height

ZOSMHB Sensor Option

- Provides occupancy detection and multi-level control with adjustable time-outs
- Tri-level dimming control
- Comes pre-installed on the end cap
- Suitable for cold storage locations
- Built-in photocell reads brightness values. Sensor does not switch luminaire on if there is sufficient ambient light
- Control parameters selected manually via DIP switches, or using the optional ZLS0R remote (sold separately) - adjustable parameters include sensitivity, hold time, lux level, stand-by light level, stand-by hold time
- Maximum mounting height of 50 feet, with adjustable coverage radius up to 30 feet




ZLS0R



Universal Douglas: Cloud-based controls

The PBL G2 can be equipped with the Douglas FMS sensor, which is designed for high bay applications.

With a max sensor height up to 40 feet, the FMS is ideal for applications like warehouses and manufacturing facilities. It can be installed for on/off control or bi-level light functionality. The daylight sensor provides additional savings by dimming the lights to work with the amount of natural available daylight.

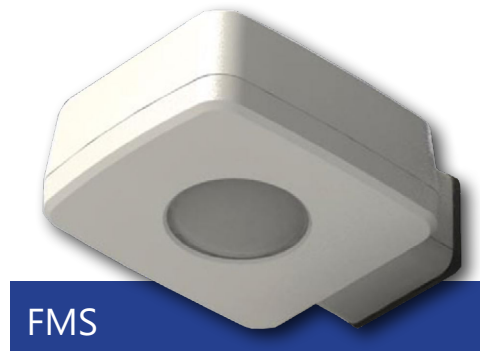

- Configuration from the floor via smartphone app
- Bluetooth mesh network is created between devices for control over a group of Douglas sensors
- Occupancy and daylight sensing
- IP65-rated
- 0-10V dimming
- 150 feet clear line of site, 50 feet through standard walls (distances may vary based on location and environment)

CheckLight® Energy Management System

Douglas controls can be integrated with the CheckLight® Energy Management system. This system can help you uncover energy conversion opportunities, create conservation strategies, analyze lighting load inefficiencies, and make configuration changes from anywhere with Douglas' user-friendly interface. You can get measurements, reports, and control your system from a web-based application.

CheckLight® has the capability to look at different facilities within a portfolio and use data benchmarks to compare building performances.

- Find energy conservation opportunities
- Create energy saving strategies
- Analyze load inefficiencies
- Optimize energy management

Enlighted: All-in-one sensors, upgradeable systems

Enlighted's IP65-rated Ruggedized Sensor is an all-in-one unit: task tuning, high-end trimming, daylight harvesting, and occupancy/vacancy detection. Max installation height is 50 feet.

Enlighted sensors come standard with the Enlighted One system (the "ZENLO" option). Enlighted Connected ("ZENLC") offers even more options. The Enlighted IoT ("ZENLI") option allows the full implementation of Enlighted's services. Each system can be fully upgraded to the next tier in the future. So if you start with Enlighted One but want to add energy reporting or building management systems integration in the future, you can.




| Enlighted Capabilities* | Enlighted One (ZENLO) | Enlighted Connected (ZENLC) | Enlighted IoT (ZENLI) |
|--|-----------------------|-----------------------------|-----------------------|
| Motion and Switch Groups | ✓ | ✓ | ✓ |
| Daylight Harvesting | ✓ | ✓ | ✓ |
| Schedule Lighting | | ✓ | ✓ |
| Energy Reporting & Optimization | | ✓ | ✓ |
| Environment Data & Lighting Controls API | | ✓ | ✓ |
| Building Management System Integration | | ✓ | ✓ |
| Where & Space Applications | | | ✓ |
| Location & Occupancy APIs & Beacons | | | ✓ |
| Future App & API Ready | | | ✓ |

Note: Additional equipment required for ZENLC and ZENLI

Real-time data analytics

Enlighted's control units compile data in real-time, which can be viewed via the Energy Manager. The Energy Manager is part of the Enlighted Connected and Enlighted IoT configurations.

- Real-time measurements and verification of energy savings
- Space analytics - data can be compiled into motion trails and heat maps
- Analyze traffic density and congestion in a space

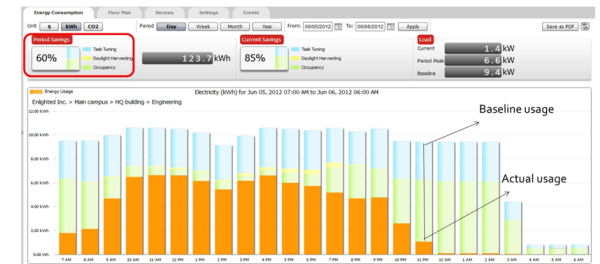

Learn more about our available advanced controls options here:
www.lumenfocus.com/controls-overview

© 2022 Enlighted for all Enlighted content and images.
 © 2022 Douglas Lighting Controls, Inc. for all Douglas content and images. The Bluetooth® word, mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by Douglas Lighting Controls is under license. Other trademarks and trade names are those of their respective owners.




Mounting:



Surface Mount


The PBL G2 is designed to be easily mounted to any sturdy surface. Simply remove the hex head screws holding the driver cover (top picture, in green) to access the bottom of the housing below. The housing can be mounted to the surface from the four holes in each corner of the channel (bottom picture, circled).



Cable Mount

The optional QC hanging kit comes in 10' or 20'. Cables are pre-looped for easy installation and designed for easy fixture height adjustment. QCs come boxed with each fixture when ordered.

Other Options:

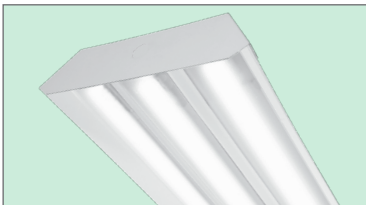

Shielding Frosted acrylic diffuser lenses minimize glare and improve aesthetics.



Cords are available in single circuit or dual circuit, 6' or 10'. Standard plug is optional, as are other NEMA configurations if specified.

Conformal coating

Grants LED boards added protection from moisture and corrosion in more hazardous environments.



Finish

In addition to the standard white finish, the PBL G2 is also available in matte black (BK) and metallic silver (SL).

